

# OmnipathR: utility functions to work with Omnipath in R

***Alberto Valdeolivas*<sup>\*1</sup>, *Attila Gabor*<sup>†1</sup>, *Denes Turei*<sup>‡1</sup>, and *Julio Saez-Rodriguez*<sup>§1,2</sup>**

<sup>1</sup>Institute of Computational Biomedicine, Heidelberg University, Faculty of Medicine, 69120 Heidelberg, Germany

<sup>2</sup>RWTH Aachen University, Faculty of Medicine, Joint Research Centre for Computational Biomedicine (JRC-COMBINE), 52074 Aachen, Germany

\*[alvaldeolivas@gmail.com](mailto:alvaldeolivas@gmail.com) †[attila.gabor@bioquant.uni-heidelberg.de](mailto:attila.gabor@bioquant.uni-heidelberg.de) ‡[denes.turei@embl.de](mailto:denes.turei@embl.de)  
§[julio.saez@bioquant.uni-heidelberg.de](mailto:julio.saez@bioquant.uni-heidelberg.de)

**June 9, 2020**

## **Abstract**

This vignette describes how to use the *OmnipathR* package to retrieve information from the Omnipath database:

<http://omnipathdb.org/>

In addition, it includes some utility functions to filter, analyse and visualize the data.

## **Package**

OmnipathR 1.2.1

Feedbacks and bugreports are always very welcomed!

Please use the Github issue page to report bugs or for questions:

<https://github.com/saezlab/OmnipathR/issues>

Many thanks for using *OmnipathR*!

## Contents

1	Introduction . . . . .	3
1.1	Query types . . . . .	3
1.2	Mouse and rat . . . . .	4
2	Installation of the <i>OmnipathR</i> package . . . . .	4
3	Usage Examples . . . . .	5
3.1	Interactions. . . . .	5
3.1.1	Protein-protein interaction networks . . . . .	6
3.1.2	Other interaction datasets . . . . .	7
3.2	Post-translational modifications (PTMs) . . . . .	10
3.3	Complexes . . . . .	12
3.4	Annotations . . . . .	13
3.5	Intercell . . . . .	16
3.6	Conclusion . . . . .	16
A	Session info . . . . .	19

# 1 Introduction

---

*OmnipathR* is an R package built to provide easy access to the data stored in the Omnipath webservice [1]:

<http://omnipathdb.org/>

The webservice implements a very simple REST style API. This package makes requests by the HTTP protocol to retrieve the data. Hence, fast Internet access is required for a proper use of *OmnipathR*.


## 1.1 Query types

*OmnipathR* can retrieve five different types of data:

- **Interactions:** protein-protein interactions organized in different datasets:
  - **Omnipath:** the OmniPath data as defined in the original publication [1] and collected from different databases.
  - **Pathwayextra:** activity flow interactions without literature reference.
  - **Kinaseextra:** enzyme-substrate interactions without literature reference.
  - **Ligrecextra:** ligand-receptor interactions without literature reference.
  - **Tfregulons:** transcription factor (TF)-target interactions from DoRothEA [2, 3].
  - **Mirnatarget:** miRNA-mRNA and TF-miRNA interactions.
- **Post-translational modifications (PTMs):** It provides enzyme-substrate reactions in a very similar way to the aforementioned interactions. Some of the biological databases related to PTMs integrated in Omnipath are Phospho.ELM [4] and PhosphoSitePlus [5].
- **Complexes:** it provides access to a comprehensive database of more than 22000 protein complexes. This data comes from different resources such as: CORUM [6] or Hu.map [7].
- **Annotations:** it provides a large variety of data regarding different annotations about proteins and complexes. These data come from dozens of databases covering different topics such as: The Topology Data Bank of Transmembrane Proteins (TOPDB) [8] or ExoCarta [9], a database collecting the proteins that were identified in exosomes in multiple organisms.
- **Intercell:** it provides information on the roles in inter-cellular signaling. For instance, if a protein is a ligand, a receptor, an extracellular matrix (ECM) component, etc. The data does not come from original sources but combined from several databases by us. The source databases, such as CellPhoneDB [10] or Receptome [11], are also referred for each record.

Figure 1 shows an overview of the resources featured in OmniPath. For more detailed information about the original data sources integrated in Omnipath, please visit: <http://omnipathdb.org/> and <http://omnipathdb.org/info>.

## OmnipathR: utility functions to work with Omnipath in R

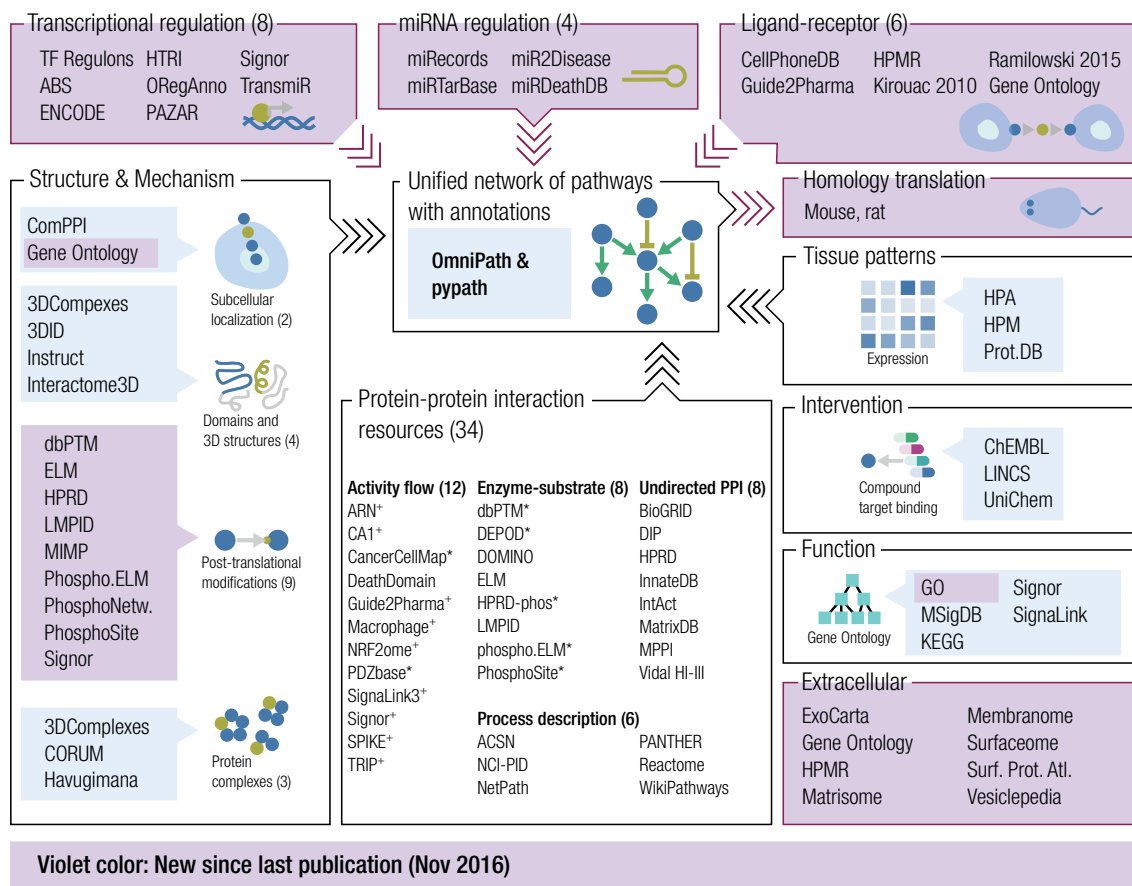

**Figure 1: Overview of the resources featured in Omnipath**

Causal resources (including activity-flow and enzyme-substrate resources) can provide direction (\*) or sign and direction (+) of interactions.

## 1.2 Mouse and rat

Excluding the miRNA interactions, all interactions and PTMs are available for human, mouse and rat. The rodent data has been translated from human using the NCBI Homologene database. Many human proteins do not have known homolog in rodents hence rodent datasets are smaller than their human counterparts.

In case you work with mouse omics data you might do better to translate your dataset to human (for example using the `pypath.homology` module, <https://github.com/saezlab/pypath/>) and use human interaction data.

## 2 Installation of the *OmnipathR* package

First of all, you need a current version of *R* ([www.r-project.org](http://www.r-project.org)). *OmnipathR* is a freely available package deposited on <http://bioconductor.org/> and <https://github.com/saezlab/OmnipathR>. You can install it by running the following commands on an *R* console:

```
> if (!requireNamespace("BiocManager", quietly = TRUE))
+   install.packages("BiocManager")
> BiocManager::install("OmnipathR")
```

### 3 Usage Examples

---

In the following paragraphs, we provide some examples to describe how to use the *OmnipathR* package to retrieve different types of information from Omnipath webservice. In addition, we play around with the data aiming at obtaining some biological relevant information.

Noteworthy, the sections **complexes**, **annotations** and **intercell** are linked. We explore the annotations and roles in inter-cellular communications of the proteins involved in a given complex. This basic example shows the usefulness of integrating the information available in the different **Omnipath** resources.

#### 3.1 Interactions

Proteins interact among them and with other biological molecules to perform cellular functions. Proteins also participates in pathways, linked series of reactions occurring inter/intra cells to transform products or to transmit signals inducing specific cellular responses. Protein interactions are therefore a very valuable source of information to understand cellular functioning.

We are going to download the original **Omnipath** human interactions [1]. To do so, we first check the different source databases and select some of them. Then, we print some of the downloaded interactions ("+" means activation, "-" means inhibition and "?" means undirected interactions or inconclusive data).

```
> library(OmnipathR)
> library(tidyr)
> library(dnet)
> library(gprofiler2)
> ## We check some of the different interaction databases
> head(get_interaction_databases(),10)

 [1] "TRIP"      "DIP"      "Wang"     "KEGG"     "BioGRID"  "Fantom5"  "HPRD"
 [8] "LRdb"     "iTALK"    "KEA"

> ## The interactions are stored into a data frame.
> interactions <-
+   import_Omnipath_Interactions(filter_databases=c("Signalink3","PhosphoSite",
+   "Signor"))
> ## We visualize the first interactions in the data frame.
> print_interactions(head(interactions))

      source interaction      target nsources nrefs
137 TRPM7 (Q96QT4) ==(+)==> ANXA1 (P04083)      14     18
 34 PRKG1 (Q13976) ==(-)==> TRPC3 (Q13507)      10     8
 74 SRC (P12931) ==(+)==> TRPV1 (Q8NER1)        9     8
 87 LYN (P07948) ==(+)==> TRPV4 (Q9HBA0)        9     6
```

```
55 PRKG1 (Q13976) ==(-)==> TRPC6 (Q9Y210)      8      5
73 PRKACA (P17612) ==(+)==> TRPV1 (Q8NER1)      6      1
```

### 3.1.1 Protein-protein interaction networks

Protein-protein interactions are usually converted into networks. Describing protein interactions as networks not only provides a convenient format for visualization, but also allows applying graph theory methods to mine the biological information they contain.

We convert here our set of interactions to a network/graph (*igraph* object). Then, we apply two very common approaches to extract information from a biological network:

- **Shortest Paths:** finding a path between two nodes (proteins) going through the minimum number of edges. This can be very useful to track consecutive reactions within a given pathway. We display below the shortest path between two given proteins and all the possible shortest paths between two other proteins. It is to note that the functions `printPath_es` and `printPath_vs` display very similar results, but the first one takes as an input an edge sequence and the second one a node sequence.

```
> ## We transform the interactions data frame into a graph
> OPI_g <- interaction_graph(interactions = interactions)
> ## Find and print shortest paths on the directed network between proteins
> ## of interest:
> printPath_es(shortest_paths(OPI_g, from = "TYR03", to = "STAT3",
+   output = 'epath')$epath[[1]], OPI_g)

      source interaction      target nsources nrefs
1 TYR03 (Q06418) ==(?)==> AKT1 (P31749)         2     0
2 AKT1 (P31749) ==(-)==> IRAK1 (P51617)        12     5
3 IRAK1 (P51617) ==(+)==> STAT3 (P40763)        10    15

> ## Find and print all shortest paths between proteins of interest:
> printPath_vs(all_shortest_paths(OPI_g, from = "DYRK2",
+   to = "MAPKAPK2")$res, OPI_g)
```


- **Clustering:** grouping nodes (proteins) in such a way that nodes belonging to the same group (called cluster) are more connected in the network to each other than to those in other groups (clusters). Since proteins interact to perform their functions, proteins within the same cluster are likely to be implicated in similar biological tasks. Figure 2 shows the subgraph containing the proteins and interactions of a specific protein. The *igraph* R package contains functions to apply several different cluster methods on graphs (visit <https://igraph.org/r/doc/> for detailed information.)

```
> ## We apply a clustering algorithm (Louvain) to group proteins in
> ## our network. We apply here Louvain which is fast but can only run
> ## on undirected graphs. Other clustering algorithms can deal with
> ## directed networks but with longer computational times,
> ## such as cluster_edge_betweenness. These cluster methods are directly
> ## available in the igraph package.
> OPI_g_undirected <- as.undirected(OPI_g, mode=c("mutual"))
> OPI_g_undirected <- simplify(OPI_g_undirected)
> cl_results <- cluster_fast_greedy(OPI_g_undirected)
```

## OmnipathR: utility functions to work with Omnipath in R

```
> ## We extract the cluster where a protein of interest is contained
> cluster_id <- cl_results$membership[which(cl_results$names == "SOCS3")]
> module_graph <- induced_subgraph(OPI_g_undirected,
+   V(OPI_g)$name[which(cl_results$membership == cluster_id)])

> ## We print that cluster with its interactions.
> par(mar=c(0.1,0.1,0.1,0.1))
> plot(module_graph, vertex.label.color="black",vertex.frame.color="#ffffff",
+   vertex.size= 15, edge.curved=.2,
+   vertex.color = ifelse(igraph::V(module_graph)$name == "CD22", "yellow",
+   "#00CCFF"), edge.color="blue",edge.width=0.8)
```

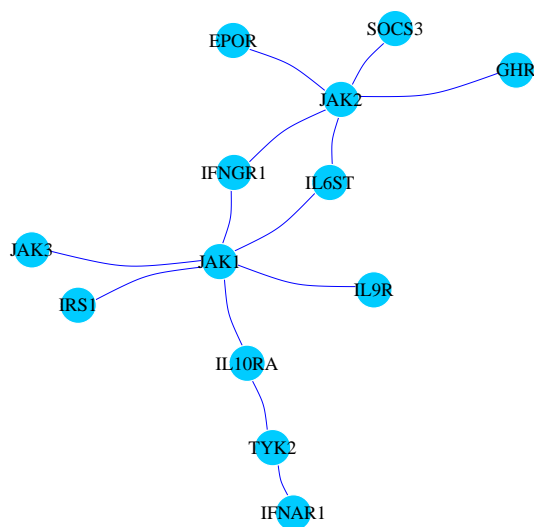

**Figure 2:**  
Subnetwork extracted from the interactions graph representing the cluster where we can find the gene *CD22* (yellow node).

### 3.1.2 Other interaction datasets

We used above the interactions from the dataset described in the original **Omnipath** publication [1]. In this section, we provide examples on how to retry and deal with interactions from the remaining datasets. The same functions can be applied to every interaction dataset.

In the first example, we are going to get the interactions from the **pathwayextra** dataset, which contains activity flow interactions without literature reference. We are going to focus on the mouse interactions for a given gene in this particular case.

```
> ## We query and store the interactions into a dataframe
> interactions <-
+   import_PathwayExtra_Interactions(filter_databases=c("BioGRID","IntAct"),
+   select_organism = 10090)
> ## We select all the interactions in which Amfr gene is involved
> interactions_Amfr <- dplyr::filter(interactions, source_genesymbol == "Amfr" |
```

## OmnipathR: utility functions to work with Omnipath in R

```
+ target_genesymbol == "Amfr")
> ## We print these interactions:
> print_interactions(interactions_Amfr)

      source interaction      target nsources
1 Amfr (Q9R049) ==(+ )==> Vcp (Q01853)      3
```

Next, we download the interactions from the **kinaseextra** dataset, which contains enzyme-substrate interactions without literature reference. We are going to focus on rat reactions targeting a particular gene.

```
> ## We query and store the interactions into a dataframe
> interactions <-
+ import_KinaseExtra_Interactions(filter_databases=c("PhosphoPoint",
+ "PhosphoSite"), select_organism = 10116)
> ## We select the interactions in which Dpysl2 gene is a target
> interactions_TargetDpysl2 <- dplyr::filter(interactions,
+ target_genesymbol == "Dpysl2")
> ## We print these interactions:
> print_interactions(interactions_TargetDpysl2)

      source interaction      target nsources
1 Gsk3b (P18266) ==(+/-)==> Dpysl2 (P47942)      19
2 Rock2 (Q62868) ==(+ )==> Dpysl2 (P47942)      12
4 Cdk5 (Q03114) ==(+ )==> Dpysl2 (P47942)      11
6 Rock1 (Q63644) ==( ? )==> Dpysl2 (P47942)       9
5 Gsk3a (P18265) ==( ? )==> Dpysl2 (P47942)       7
3 Fer (P09760) ==( ? )==> Dpysl2 (P47942)       5
```

In the following example we are going to work with the **ligrecextra** dataset, which contains ligand-receptor interactions without literature reference. Our goal is to find the potential receptors associated to a given ligand. For a more global overview, we induce a network containing the genes involved in these interactions (Figure 3).


```
> ## We query and store the interactions into a dataframe
> interactions <- import_LigrecExtra_Interactions(filter_databases=c("HPRD",
+ "Guide2Pharma"),select_organism=9606)
> ## Receptors of the CDH1 ligand.
> interactions_CDH1 <- dplyr::filter(interactions, source_genesymbol == "CDH1")
> ## We transform the interactions data frame into a graph
> OPI_g <- interaction_graph(interactions = interactions_CDH1)
> ## We induce a network with the genes involved in the shortest path and their
> ## first neighbors to get a more general overview of the interactions
> Induced_Network <- dNetInduce(g=OPI_g,
+ nodes_query=as.character( V(OPI_g)$name), knn=0,
+ remove.loops=FALSE, largest.comp=FALSE)
>
```

```
> ## We print the induced network
> par(mar=c(0.1,0.1,0.1,0.1))
> plot(Induced_Network, vertex.label.color="black",
+ vertex.frame.color="#ffffff",vertex.size= 20, edge.curved=.2,
```



## OmnipathR: utility functions to work with Omnipath in R

```
+ vertex.color =
+   ifelse(igraph::V(Induced_Network)$name %in% c("CDH1"),
+         "yellow", "#00CCFF"), edge.color="blue",edge.width=0.8)
```

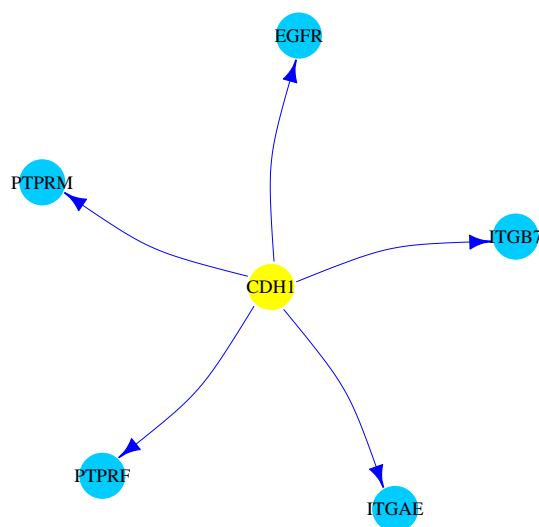

**Figure 3:**

Subnetwork extracted from the **kinaseextra** interactions graph containing the shortest path between *B2M* and *TFR2* (yellow nodes). The first neighbors of the genes involved in the shortest path are also shown.

Another very interesting interaction dataset also available in Omnipath are the **tfregulons** from DoRothEA [2, 3]. It contains transcription factor (TF)-target interactions with confidence score, ranging from A-E, being A the most confident interactions. In the code chunk shown below, we select and print the most confident interactions for a given TF.

```
> ## We query and store the interactions into a dataframe
> interactions <- import_TFregulons_Interactions(filter_databases=c("DoRothEA_A",
+   "ARACNe-GTEx_DoRothEA"),select_organism=9606)
> ## We select the most confident interactions for a given TF and we print
> ## the interactions to check the way it regulates its different targets
> interactions_A_GLI1 <- dplyr::filter(interactions, dorothea_level=="A",
+   source_genesymbol == "GLI1")
> print_interactions(interactions_A_GLI1)
```

	source	interaction	target	nsources
1	GLI1 (P08151)	==( + )==>	PTCH1 (Q13635)	5
2	GLI1 (P08151)	==( + )==>	BCL2 (P10415)	5
3	GLI1 (P08151)	==( - )==>	EGR2 (P11161)	3
4	GLI1 (P08151)	==( + )==>	IGFBP6 (P24592)	3
5	GLI1 (P08151)	==( + )==>	SFRP1 (Q8N474)	3
6	GLI1 (P08151)	==( - )==>	SLIT2 (094813)	3

The last dataset describing interactions is **mirnatarget**. It stores miRNA-mRNA and TF-miRNA interactions. These interactions are only available for human so far. We next select the miRNA interacting with the TF selected in the previous code chunk, *GLI1*. The main function of miRNAs seems to be related with gene regulation. It is therefore interesting to see

## OmnipathR: utility functions to work with Omnipath in R

how some miRNA can regulate the expression of a TF which in turn regulates the expression of other genes. Figure 4 shows a schematic network of the miRNA targeting *GLI1* and the genes regulated by this TF.

```
> ## We query and store the interactions into a dataframe
> interactions <-
+   import_miRNAtarget_Interactions(filter_databases=c("miRTarBase","miRecords"))
> ## We select the interactions where a miRNA is interacting with the TF
> ## used in the previous code chunk and we print these interactions.
> interactions_miRNA_GLI1 <-
+   dplyr::filter(interactions, target_genesymbol == "GLI1")
> print_interactions(interactions_miRNA_GLI1)
```

	source	interaction	target	nsources	nrefs
2	hsa-miR-324-5p (MIMAT0000761)	==( ? )==>	GLI1 (P08151)	3	3
1	hsa-miR-125b (MIMAT0000423)	==( ? )==>	GLI1 (P08151)	2	1
3	hsa-miR-326 (MIMAT0000756)	==( ? )==>	GLI1 (P08151)	2	1
4	hsa-miR-202-3p (MIMAT0002811)	==( ? )==>	GLI1 (P08151)	1	1
5	hsa-miR-133b (MIMAT0000770)	==( ? )==>	GLI1 (P08151)	1	1

```
> ## We transform the previous selections to graphs (igraph objects)
> OPI_g_1 <-interaction_graph(interactions = interactions_A_GLI1)
> OPI_g_2 <-interaction_graph(interactions = interactions_miRNA_GLI1)
```

```
> ## We print the union of both previous graphs
> par(mar=c(0.1,0.1,0.1,0.1))
> plot(OPI_g_1 %u% OPI_g_2, vertex.label.color="black",
+   vertex.frame.color="#ffffff",vertex.size= 20, edge.curved=.25,
+   vertex.color = ifelse(grepl("miR",igraph::V(OPI_g_1 %u% OPI_g_2)$name),
+   "red",ifelse(igraph::V(OPI_g_1 %u% OPI_g_2)$name == "GLI1",
+   "yellow","#00CCFF")), edge.color="blue",
+   vertex.shape = ifelse(grepl("miR",igraph::V(OPI_g_1 %u% OPI_g_2)$name),
+   "vrectangle","circle"),edge.width=0.8)
```

## 3.2 Post-translational modifications (PTMs)


Another query type available is PTMs which provides enzyme-substrate reactions in a very similar way to the aforementioned interactions. PTMs refer generally to enzymatic modification of proteins after their synthesis in the ribosomes. PTMs can be highly context-specific and they play a main role in the activation/inhibition of biological pathways.

In the next code chunk, we download the **PTMs** for human. We first check the different available source databases, even though we do not perform any filter. Then, we select and print the reactions involving a specific enzyme-substrate pair. Those reactions lack information about activation or inhibition. To obtain that information, we match the data with **Omnipath** interactions. Finally, we show that it is also possible to build a graph using this information, and to retrieve PTMs from mouse or rat.

```
> ## We check the different PTMs databases
> get_ptms_databases()

[1] "KEA" "MIMP"
```

## OmnipathR: utility functions to work with Omnipath in R

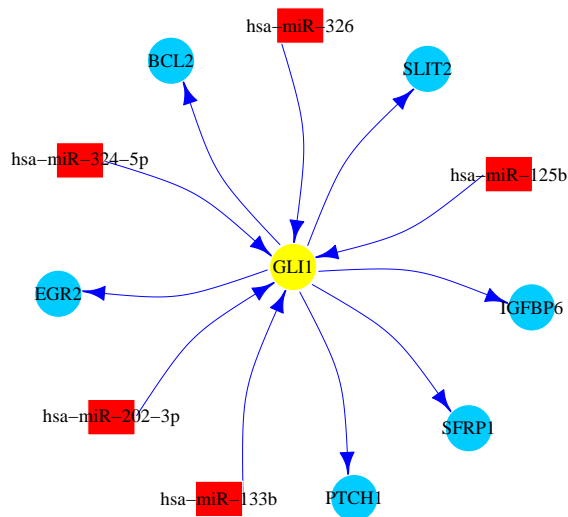

**Figure 4:** Schematic network of the miRNA (red square nodes) targeting *GLI1* (yellow node) and the genes regulated by this TF (blue round nodes).

```
[3] "PhosphoNetworks"          "PhosphoSite"
[5] "PhosphoSite_MIMP"        "PhosphoSite_ProtMapper"
[7] "ProtMapper"              "phosphoELM"
[9] "phosphoELM_MIMP"        "BEL-Large-Corpus_ProtMapper"
[11] "HPRD"                    "HPRD_MIMP"
[13] "RLIMS-P_ProtMapper"      "SIGNOR"
[15] "SIGNOR_ProtMapper"       "dbPTM"
[17] "Li2012"                  "NCI-PID_ProtMapper"
[19] "REACH_ProtMapper"        "Sparser_ProtMapper"
[21] "Reactome_ProtMapper"     "DEPOD"

> ## We query and store the ptms into a dataframe. No filtering by
> ## databases in this case.
> ptms <- import_Omnipath_PTMS()
> ## We can select and print the reactions between a specific kinase and
> ## a specific substrate
> print_interactions(dplyr::filter(ptms,enzyme_genesymbol=="MAP2K1",
+   substrate_genesymbol=="MAPK3"))

      enzyme interaction      substrate  modification nsources
1 MAP2K1 (Q02750)      =====> MAPK3_Y204 (P27361) phosphorylation    16
2 MAP2K1 (Q02750)      =====> MAPK3_T202 (P27361) phosphorylation    15
3 MAP2K1 (Q02750)      =====> MAPK3_Y210 (P27361) phosphorylation     3
4 MAP2K1 (Q02750)      =====> MAPK3_T207 (P27361) phosphorylation     3
5 MAP2K1 (Q02750)      =====>  MAPK3_T80 (P27361) phosphorylation     1
6 MAP2K1 (Q02750)      =====> MAPK3_Y222 (P27361) phosphorylation     1

> ## In the previous results, we can see that ptms does not contain sign
> ## (activation/inhibition). We can generate this information based on the
> ## protein-protein Omnipath interaction dataset.
```

## OmnipathR: utility functions to work with Omnipath in R

```
> interactions <- import_Omnipath_Interactions()
> ptms <- get_signed_ptms(ptms,interactions)
> ## We select again the same kinase and substrate. Now we have information
> ## about inhibition or activation when we print the ptms
> print_interactions(dplyr::filter(ptms,enzyme_genesymbol=="MAP2K1",
+   substrate_genesymbol=="MAPK3"))
```

	enzyme	interaction	substrate	modification	nresources
6	MAP2K1 (Q02750)	==( + )==>	MAPK3_Y204 (P27361)	phosphorylation	16
4	MAP2K1 (Q02750)	==( + )==>	MAPK3_T202 (P27361)	phosphorylation	15
2	MAP2K1 (Q02750)	==( + )==>	MAPK3_Y210 (P27361)	phosphorylation	3
3	MAP2K1 (Q02750)	==( + )==>	MAPK3_T207 (P27361)	phosphorylation	3
1	MAP2K1 (Q02750)	==( + )==>	MAPK3_Y222 (P27361)	phosphorylation	1
5	MAP2K1 (Q02750)	==( + )==>	MAPK3_T80 (P27361)	phosphorylation	1

```
> ## We can also transform the ptms into a graph.
> ptms_g <- ptms_graph(ptms = ptms)
> ## We download PTMs for mouse
> ptms <- import_Omnipath_PTMS(filter_databases=c("PhosphoSite", "Signor"),
+   select_organism=10090)
```

### 3.3 Complexes

Some studies indicate that around 80% of the human proteins operate in complexes, and many proteins belong to several different complexes [12]. These complexes play critical roles in a large variety of biological processes. Some well-known examples are the proteasome and the ribosome. Thus, the description of the full set of protein complexes functioning in cells is essential to improve our understanding of biological processes.

The **complexes** query provides access to more than 20000 protein complexes. This comprehensive database has been created by integrating different resources. We now download these molecular complexes filtering by some of the source databases. We check the complexes where a couple of specific genes participate. First, we look for the complexes where any of these two genes participate. We then identify the complex where these two genes are jointly involved. Finally, we perform an enrichment analysis with the genes taking part in that complex. You should keep an eye on this complex since it will be used again in the forthcoming sections.

```
> ## We check the different complexes databases
> get_complexes_databases()
```

[1]	"ComplexPortal"	"PDB"	"hu.MAP"	"Signor"
[5]	"Compleat"	"CORUM"	"ICELNET"	"CellPhoneDB"
[9]	"Havugimana2012"	"HMPMR"	"Guide2Pharma"	"SIGNOR"
[13]	"CFinder"	"NetworkBlast"		

```
> ## We query and store complexes from some sources into a dataframe.
> complexes <- import_Omnipath_complexes(filter_databases=c("CORUM", "hu.MAP"))
> ## We check all the molecular complexes where a set of genes participate
> query_genes <- c("WRN", "PARP1")
> ## Complexes where any of the input genes participate
> complexes_query_genes_any <- unique(get_complex_genes(complexes, query_genes,
```

## OmnipathR: utility functions to work with Omnipath in R

```
+ total_match=FALSE))
> ## We print the components of the different selected components
> head(complexes_query_genes_any$components_genesymbols,6)

[1] "NCAPD2_NCAPG_NCAPH_PARP1_SMC2_SMC4_XRCC1"
[2] "CCNA2_CDK2_LIG1_PARP1_POLA1_POLD1_POLE_RFC1_RFC2_RPA1_RPA2_RPA3_TOP1"
[3] "CCNA2_CCNB1_CDK1_PARP1_POLA1_POLD1_POLE_RFC1_RFC2_RPA1_RPA2_RPA3_TOP1"
[4] "MRE11_PARP1_RAD50_TERF2_TERF2IP_XRCC5_XRCC6"
[5] "TERF2_WRN"
[6] "CALR_DHX30_H2AFX_HIST3H2BB_HSPA5_NPM1_PARP1"

> ## Complexes where all the input genes participate jointly
> complexes_query_genes_join <- unique(get_complex_genes(complexes,query_genes,
+ total_match=TRUE))
> ## We print the components of the different selected components
> complexes_query_genes_join$components_genesymbols

[1] "PARP1_WRN_XRCC5_XRCC6"
```

```
> genes_complex <-
+ unlist(strsplit(complexes_query_genes_join$components_genesymbols, "_"))
> ## We can perform an enrichment analyses with the genes in the complex
> EnrichmentResults <- gost(genes_complex, significant = TRUE,
+ user_threshold = 0.001, correction_method = c("fdr"),
+ sources=c("GO:BP", "GO:CC", "GO:MF"))
> ## We show the most significant results
> EnrichmentResults$result %>%
+ dplyr::select(term_id, source, term_name, p_value) %>%
+ dplyr::top_n(5, -p_value)

  term_id source          term_name      p_value
1 GO:0010332 GO:BP      response to gamma radiation 5.249561e-08
2 GO:0032392 GO:BP          DNA geometric change 3.532059e-07
3 GO:0032508 GO:BP          DNA duplex unwinding 3.532059e-07
4 GO:0010212 GO:BP      response to ionizing radiation 6.490259e-07
5 GO:0000781 GO:CC      chromosome, telomeric region 3.067319e-07
```

## 3.4 Annotations

Biological annotations are statements, usually traceable and curated, about the different features of a biological entity. At the genetic level, annotations describe the biological function, the subcellular situation, the DNA location and many other related properties of a particular gene or its gene products.

The annotations query provides a large variety of data about proteins and complexes. These data come from dozens of databases and each kind of annotation record contains different fields. Because of this, here we have a `record_id` field which is unique within the records of each database. Each row contains one key value pair and you need to use the `record_id` to connect the related key-value pairs (see examples below).

## OmnipathR: utility functions to work with Omnipath in R

Now, we focus in the annotations of the complex studied in the previous section. We first inspect the different available databases in the omnipath webservice. Then, we download the annotations for our complex itself as a biological entity. We find annotations related to the nucleus and transcriptional control, which is in agreement with the enrichment analysis results of its individual components.

```
> ## We check the different annotation databases
> get_annotation_databases()

 [1] "Ramilowski2015"      "LOCATE"           "TopDB"
 [4] "KEGG"                "MSigDB"           "HPA_tissue"
 [7] "Baccin2019"         "EMBRACE"          "Zhong2015"
[10] "NetPath"            "TCDB"             "HPA_subcellular"
[13] "CancerGeneCensus"   "Integrins"        "iTALK"
[16] "MatrixDB"           "DGIdb"            "ComPPI"
[19] "CellPhoneDB"        "CSPA_celltype"    "HGNC"
[22] "Membranome"         "Matrisome"        "kinase.com"
[25] "CPAD"               "Signalink_pathway" "TFcensus"
[28] "Kirouac2010"        "LRdb"             "Exocarta"
[31] "Surfaceome"         "HPMR"             "Phosphatome"
[34] "Vesiclepedia"       "HPA_secretome"    "CellCellInteractions"
[37] "Phobius"            "GPCRdb"           "MCAM"
[40] "CancerSEA"          "DisGeNet"         "Guide2Pharma"
[43] "ICELLETNET"         "CSPA"             "OPM"
[46] "GO_Intercell"       "Int0Gen"          "Signalink_function"
[49] "CellPhoneDB_complex" "CORUM_GO"         "CORUM_Funcat"
[52] "ICELLETNET_complex" "HPMR_complex"     "SIGNOR"
[55] "Adhesome"           "Ramilowski_location" "UniProt_location"
[58] "UniProt_keyword"    "UniProt_tissue"   "UniProt_family"
[61] "UniProt_topology"   "Almen2009"

> ## We can further investigate the features of the complex selected
> ## in the previous section.
>
> ## We first get the annotations of the complex itself:
> annotations <- import_Omnipath_annotations(select_genes=paste0("COMPLEX:",
+ complexes_query_genes_join$components_genesymbols))
> head(dplyr::select(annotations, source, label, value), 10)

  source  label  value
1 LOCATE  location nucleolus
2 LOCATE  location  nucleus
3 MSigDB  collection chemical_and_genetic_perturbations
4 MSigDB  geneset    PUJANA_BRCA1_PCC_NETWORK
5 MSigDB  collection chemical_and_genetic_perturbations
6 MSigDB  geneset    PUJANA_CHEK2_PCC_NETWORK
7 MSigDB  collection reactome_pathways
8 MSigDB  geneset    REACTOME_DNA_REPAIR
9 MSigDB  collection chemical_and_genetic_perturbations
10 MSigDB geneset    COLLIS_PRKDC_SUBSTRATES
```

Afterwards, we explore the annotations of the individual components of the complex in some databases. We check the pathways where these proteins are involved. Once again, we also find many nucleus related annotations when checking their cellular location.

## OmnipathR: utility functions to work with Omnipath in R

```

> ## Then, we explore some annotations of its individual components
>
> ## Pathways where the proteins belong:
> annotations <- import_Omnipath_annotations(select_genes=genes_complex,
+     filter_databases=c("NetPath"))
> dplyr::select(annotations, genesymbol, value)

  genesymbol                                     value
1     PARP1      Corticotropin-releasing hormone (CRH)
2     PARP1 TNF-related weak inducer of apoptosis (TWEAK)
3     PARP1      Tumor necrosis factor (TNF) alpha
4     PARP1      Oncostatin-M (OSM)
5     PARP1      Androgen receptor (AR)
6     XRCC5      Androgen receptor (AR)
7     XRCC6      Androgen receptor (AR)

> ## Cellular localization of our proteins
> annotations <- import_Omnipath_annotations(select_genes=genes_complex,
+     filter_databases=c("ComPPI"))
> ## Since we have same record_id for some results of our query, we spread
> ## these records across columns
> spread(annotations, label, value) %>%
+   dplyr::arrange(desc(score)) %>%
+   dplyr::top_n(10, score)

  uniprot genesymbol entity_type source record_id  location
1  P12956   XRCC6      protein ComPPI    2972   nucleus
2  P09874   PARP1      protein ComPPI    11261  nucleus
3  Q14191   WRN        protein ComPPI    16122  nucleus
4  P13010   XRCC5      protein ComPPI    13394  nucleus
5  P13010   XRCC5      protein ComPPI    13396  membrane
6  P12956   XRCC6      protein ComPPI    2971   cytosol
7  P13010   XRCC5      protein ComPPI    13393  cytosol
8  Q14191   WRN        protein ComPPI    16123  cytosol
9  P12956   XRCC6      protein ComPPI    2974   membrane
10 P12956   XRCC6      protein ComPPI    2975  extracellular
11 P13010   XRCC5      protein ComPPI    13395  extracellular

  score
1 0.99999997629184
2 0.999999887104
3 0.9999996544
4 0.99999868288
5 0.972
6 0.958
7 0.958
8 0.94
9 0.8600000000000001
10 0.8600000000000001
11 0.8600000000000001

```

### 3.5 Intercell

Cells perceive cues from their microenvironment and neighboring cells, and respond accordingly to ensure proper activities and coordination between them. The ensemble of these communication process is called inter-cellular signaling (**intercell**).

**Intercell** query provides information about the roles of proteins in inter-cellular signaling (e.g. if a protein is a ligand, a receptor, an extracellular matrix (ECM) component, etc.) This query type is very similar to annotations. However, **intercell** data does not come from original sources, but combined from several databases by us into categories (we also refer to the original sources).

We first inspect the different categories available in the Omnipath webserver. Then, we focus again in our previously selected complex and we check its potential roles in inter-cellular signaling. We repeat the analysis with its individual components.

```
> ## We check some of the different intercell categories
> head(get_intercell_categories(),10)

 [1] "apical_cell_membrane"      "apicolateral_cell_membrane"
 [3] "basal_cell_membrane"      "basolateral_cell_membrane"
 [5] "lateral_cell_membrane"    "lhfpl"
 [7] "peripheral"               "plasma_membrane"
 [9] "transmembrane"           "transmembrane_phobius"

> ## We import the intercell data into a dataframe
> intercell <- import_Omnipath_intercell()
> ## We check the intercell annotations for the individual components of
> ## our previous complex. We filter our data to print it in a good format
> dplyr::filter(intercell,genesymbol %in% genes_complex) %>%
+   dplyr::distinct(genesymbol, parent, .keep_all = TRUE) %>%
+   dplyr::select(category, genesymbol, parent) %>%
+   dplyr::arrange(genesymbol)

  category genesymbol      parent
1 intracellular  PARP1 intracellular
2 intracellular   WRN intracellular
3 intracellular  XRCC5 intracellular
4 intracellular  XRCC6 intracellular

> ## We close graphical connections
> while (!is.null(dev.list())) dev.off()
```

### 3.6 Conclusion

*OmnipathR* provides access to the wealth of data stored in the Omnipath webservice <http://omnipathdb.org/> from the *R* environment. In addition, it contains some utility functions for visualization, filtering and analysis. The main strength of *OmnipathR* is the straightforward transformation of the different Omnipath data into commonly used *R* objects, such as dataframes and graphs. Consequently, it allows an easy integration of the different types of data and a gateway to the vast number of *R* packages dedicated to the analysis and representation of biological data. We highlighted these abilities in some of the examples detailed in previous sections of this document.



## References

- [1] Dénes Türei, Tamás Korcsmáros, and Julio Saez-Rodriguez. OmniPath: guidelines and gateway for literature-curated signaling pathway resources. *Nature Methods*, 13(12):966–967, November 2016. URL: <https://doi.org/10.1038/nmeth.4077>, doi:10.1038/nmeth.4077.
- [2] Luz Garcia-Alonso, Francesco Iorio, Angela Matchan, Nuno Fonseca, Patricia Jaaks, Gareth Peat, Miguel Pignatelli, Fiammetta Falcone, Cyril H. Benes, Ian Dunham, Graham Bignell, Simon S. McDade, Mathew J. Garnett, and Julio Saez-Rodriguez. Transcription factor activities enhance markers of drug sensitivity in cancer. *Cancer Research*, 78(3):769–780, December 2017. URL: <https://doi.org/10.1158/0008-5472.can-17-1679>, doi:10.1158/0008-5472.can-17-1679.
- [3] Luz Garcia-Alonso, Christian H. Holland, Mahmoud M. Ibrahim, Denes Turei, and Julio Saez-Rodriguez. Benchmark and integration of resources for the estimation of human transcription factor activities. *Genome Research*, 29(8):1363–1375, July 2019. URL: <https://doi.org/10.1101/gr.240663.118>, doi:10.1101/gr.240663.118.
- [4] H. Dinkel, C. Chica, A. Via, C. M. Gould, L. J. Jensen, T. J. Gibson, and F. Diella. Phospho.ELM: a database of phosphorylation sites—update 2011. *Nucleic Acids Research*, 39(Database):D261–D267, November 2010. URL: <https://doi.org/10.1093/nar/gkq1104>, doi:10.1093/nar/gkq1104.
- [5] Peter V. Hornbeck, Bin Zhang, Beth Murray, Jon M. Kornhauser, Vaughan Latham, and Elzbieta Skrzypek. PhosphoSitePlus, 2014: mutations, PTMs and recalibrations. *Nucleic Acids Research*, 43(D1):D512–D520, December 2014. URL: <https://doi.org/10.1093/nar/gku1267>, doi:10.1093/nar/gku1267.
- [6] Madalina Giurgiu, Julian Reinhard, Barbara Brauner, Irmtraud Dunger-Kaltenbach, Gisela Fobo, Goar Frishman, Corinna Montrone, and Andreas Ruepp. CORUM: the comprehensive resource of mammalian protein complexes—2019. *Nucleic Acids Research*, 47(D1):D559–D563, October 2018. URL: <https://doi.org/10.1093/nar/gky973>, doi:10.1093/nar/gky973.
- [7] Kevin Drew, Chanjae Lee, Ryan L Huizar, Fan Tu, Blake Borgeson, Claire D McWhite, Yun Ma, John B Wallingford, and Edward M Marcotte. Integration of over 9, 000 mass spectrometry experiments builds a global map of human protein complexes. *Molecular Systems Biology*, 13(6):932, June 2017. URL: <https://doi.org/10.15252/msb.20167490>, doi:10.15252/msb.20167490.
- [8] László Dobson, Tamás Langó, István Reményi, and Gábor E. Tusnády. Expediting topology data gathering for the TOPDB database. *Nucleic Acids Research*, 43(D1):D283–D289, November 2014. URL: <https://doi.org/10.1093/nar/gku1119>, doi:10.1093/nar/gku1119.
- [9] Shivakumar Keerthikumar, David Chisanga, Dinuka Ariyaratne, Haidar Al Saffar, Sushma Anand, Kening Zhao, Monisha Samuel, Mohashin Pathan, Markandeya Jois, Naveen Chilamkurti, Lahiru Gangoda, and Suresh Mathivanan. ExoCarta: A web-based compendium of exosomal cargo. *Journal of Molecular Biology*, 428(4):688–692, February 2016. URL: <https://doi.org/10.1016/j.jmb.2015.09.019>, doi:10.1016/j.jmb.2015.09.019.

## OmnipathR: utility functions to work with Omnipath in R

- [10] Roser Vento-Tormo, Mirjana Efremova, Rachel A. Botting, Margherita Y. Turco, Miquel Vento-Tormo, Kerstin B. Meyer, Jong-Eun Park, Emily Stephenson, Krzysztof Polański, Angela Goncalves, Lucy Gardner, Staffan Holmqvist, Johan Henriksson, Angela Zou, Andrew M. Sharkey, Ben Millar, Barbara Innes, Laura Wood, Anna Wilbrey-Clark, Rebecca P. Payne, Martin A. Ivarsson, Steve Lisgo, Andrew Filby, David H. Rowitch, Judith N. Bulmer, Gavin J. Wright, Michael J. T. Stubbington, Muzlifah Haniffa, Ashley Moffett, and Sarah A. Teichmann. Single-cell reconstruction of the early maternal–fetal interface in humans. *Nature*, 563(7731):347–353, November 2018. URL: <https://doi.org/10.1038/s41586-018-0698-6>, doi:10.1038/s41586-018-0698-6.
- [11] I. Ben-Shlomo, S. Yu Hsu, R. Rauch, H. W. Kowalski, and A. J. W. Hsueh. Signaling receptome: A genomic and evolutionary perspective of plasma membrane receptors involved in signal transduction. *Science Signaling*, 2003(187):re9–re9, June 2003. URL: <https://doi.org/10.1126/stke.2003.187.re9>, doi:10.1126/stke.2003.187.re9.
- [12] Tord Berggård, Sara Linse, and Peter James. Methods for the detection and analysis of protein–protein interactions. *PROTEOMICS*, 7(16):2833–2842, August 2007. URL: <https://doi.org/10.1002/pmic.200700131>, doi:10.1002/pmic.200700131.

## A Session info

---

- R version 4.0.0 (2020-04-24), x86\_64-pc-linux-gnu
- Locale: LC\_CTYPE=en\_US.UTF-8, LC\_NUMERIC=C, LC\_TIME=en\_US.UTF-8, LC\_COLLATE=C, LC\_MONETARY=en\_US.UTF-8, LC\_MESSAGES=en\_US.UTF-8, LC\_PAPER=en\_US.UTF-8, LC\_NAME=C, LC\_ADDRESS=C, LC\_TELEPHONE=C, LC\_MEASUREMENT=en\_US.UTF-8, LC\_IDENTIFICATION=C
- Running under: Ubuntu 18.04.4 LTS
- Matrix products: default
- BLAS: /home/biocbuild/bbs-3.11-bioc/R/lib/libRblas.so
- LAPACK: /home/biocbuild/bbs-3.11-bioc/R/lib/libRlapack.so
- Base packages: base, datasets, grDevices, graphics, methods, stats, utils
- Other packages: BiocStyle 2.16.0, OmnipathR 1.2.1, dnet 1.1.7, dplyr 1.0.0, ggplot2 3.3.1, ggraph 2.0.3, gprofiler2 0.1.9, hexbin 1.28.1, igraph 1.2.5, supraHex 1.26.0, tidyr 1.1.0
- Loaded via a namespace (and not attached): BiocGenerics 0.34.0, BiocManager 1.30.10, MASS 7.3-51.6, Matrix 1.2-18, R6 2.4.1, RCurl 1.98-1.2, Rcpp 1.0.4.6, Rgraphviz 2.32.0, ape 5.4, assertthat 0.2.1, bitops 1.0-6, bookdown 0.19, cli 2.0.2, colorspace 1.4-1, compiler 4.0.0, crayon 1.3.4, data.table 1.12.8, digest 0.6.25, ellipsis 0.3.1, evaluate 0.14, fansi 0.4.1, farver 2.0.3, generics 0.0.2, ggforce 0.3.1, ggrepel 0.8.2, glue 1.4.1, graph 1.66.0, graphlayouts 0.7.0, grid 4.0.0, gridExtra 2.3, gtable 0.3.0, htmltools 0.4.0, htmlwidgets 1.5.1, httr 1.4.1, jsonlite 1.6.1, knitr 1.28, labeling 0.3, lattice 0.20-41, lazyeval 0.2.2, lifecycle 0.2.0, magick 2.3, magrittr 1.5, munsell 0.5.0, nlme 3.1-148, parallel 4.0.0, pillar 1.4.4, pkgconfig 2.0.3, plotly 4.9.2.1, polyclip 1.10-0, purrr 0.3.4, rlang 0.4.6, rmarkdown 2.2, scales 1.1.1, stats4 4.0.0, stringi 1.4.6, stringr 1.4.0, tibble 3.0.1, tidygraph 1.2.0, tidysselect 1.1.0, tools 4.0.0, tweenr 1.0.1, utf8 1.1.4, vctrs 0.3.1, viridis 0.5.1, viridisLite 0.3.0, withr 2.2.0, xfun 0.14, yaml 2.2.1